

P-602 PiezoMove Flexure Actuator with High Stiffness

Integrated Guiding System, High Force and Large Travel Ranges



P-602 linear actuator family featuring travel ranges of 100, 500, and 1000 µm (from left to right)

- Frictionless Flexure Guiding System for Straight Motion
- Integrated Motion Amplifier for Travel Ranges to 1 mm
- High Dynamics and Stiffness, Forces to 400 N, Backlash-Free Construction
- Outstanding Lifetime Due to PICMA® Piezo Actuators
- Available with Integrated Position Sensor
- Custom Designs with Larger Travel or Faster Response and Non-Magnetic Versions Feasible
- Ideal for OEM-Applications in Adaptronics, Biotechnology or Microfluidics

P-602 PiezoMove flexure-guided piezo actuators integrate a frictionless high-efficiency motion amplifier to combine large travel ranges up to 1 millimeter

Application Examples

- Nanopositioning
- Adaptronics
- Active vibration control
- Nano-imprinting
- Active Tool control
- Laser technology
- Semiconductor technology
- Active and adaptive optics

with high stiffness and very fast response. They do not contain any components that require maintenance or are subject to wear or tear. The flexure guides eliminate tip motion permitting only for a very slight tilt at the drive head. This design feature saves the cost for additional guiding systems when integrating these actuators in applications for the active control of tools, vibrations or deformations for accuracies down to a few 10s of nanometers.


Options and Custom Versions

For OEM applications, PiezoMove actuators can be modified in various ways to suit the customer's requirements. The

Ordering Information


PiezoMove® OEM Linear Actuator with High Stiffness

- 1 Travel Range 100 µm
- 3 Travel Range 300 µm
- 5 Travel Range 500 µm
- 8 Travel Range 1000 µm



PiezoMove® OEM Linear Actuators with High Force

- 1 Travel Range 100 µm
- 3 Travel Range 300 µm
- 5 Travel Range 500 µm

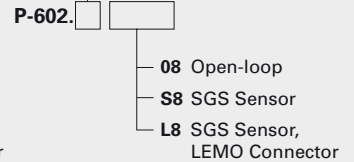

Ask about custom designs!

stiffness and force generation can be influenced via the lever design and the dimensions of the piezo ceramics used in the actuator. If only a small force and low guiding accuracy are required, large strokes of several 100 µm and high frequencies can be achieved with small actuators, e.g. for micropump drives. For high-accuracy applications, an integrated position feedback sensor is available. The actuators were designed to allow for considerable cost savings in large production runs.


OEM Control Electronics

PI also supplies a variety of controllers to match the actuators. These range from simple amplifier modules (see p. 2-164) and analog closed-loop OEM controllers (see p. 2-110)

to high-performance digital controllers (see p. 2-100ff). The great choice of actuators and controllers allows customers to select the optimum combination of performance and cost for their application.


Ceramic-Insulated Piezo Actuators Provide Superior Lifetime

The highest possible reliability is assured by employing the award-winning PICMA® multi-layer piezo actuators. PICMA® actuators are the only actuators on the market with a ceramic-only insulation which makes them resistant to ambient humidity and leakage-current failures. They are thus far superior to conventional actuators in reliability and lifetime.

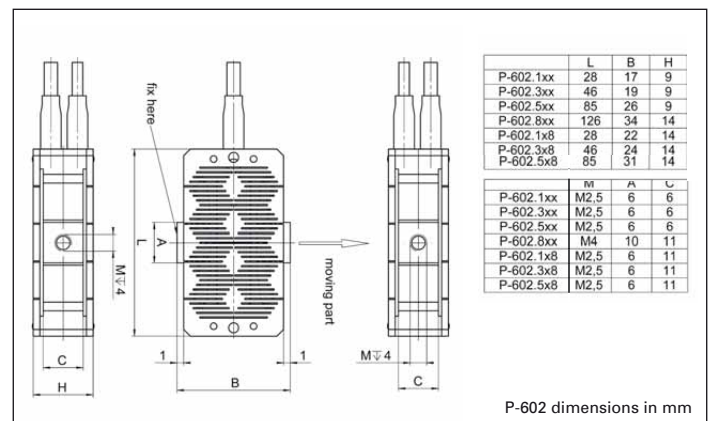



PI offers a large variety of standard and custom lever-amplified piezo actuators for almost any application

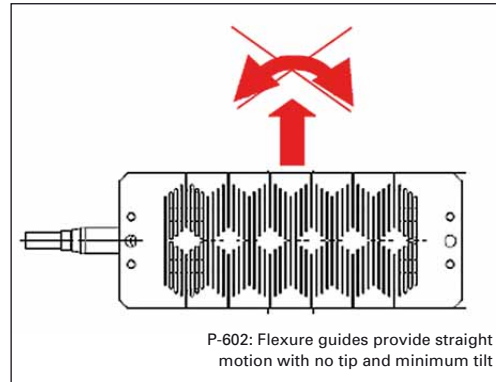

Technical Data (preliminary)

Model	P-602.100 P-602.1S0 P-602.1SL	P-602.300 P-602.3S0 P-602.3SL	P-602.500 P-602.5S0 P-602.5SL	P-602.108 P-602.1S8 P-602.1L8	P-602.308 P-602.3S8 P-602.3L8	P-602.508 P-602.5S8 P-602.5L8	P-602.800 P-602.8S0 P-602.8SL	Units	Tolerance
Active axes	X	X	X	X	X	X	X		
Motion and positioning									
Integrated sensor	- / SGS / SGS	- / SGS / SGS	- / SGS / SGS	- / SGS / SGS	- / SGS / SGS	- / SGS / SGS	- / SGS / SGS		
Open-loop travel, -20 to +120 V	120	300	600	100	300	500	1000	µm	min. (+20%/-0)
Closed-loop travel	- / 100 / 100	- / 300 / 300	- / 500 / 500	- / 100 / 100	- / 300 / 300	- / 500 / 500	- / 1000 / 1000	µm	
Open-loop resolution	0.2	0.3	0.4	0.2	0.3	0.4	0.5	nm	typ.
Closed-loop resolution	- / 2 / 2	- / 3 / 3	- / 3 / 3	- / 2 / 2	- / 3 / 3	- / 3 / 3	- / 7 / 7	nm	typ.
Linearity, closed-loop	- / 0.5 / 0.5	- / 0.5 / 0.5	- / 0.5 / 0.5	- / 0.5 / 0.5	- / 0.5 / 0.5	- / 0.5 / 0.5	- / 1.5 / 1.5	%	typ.
Repeatability	- / 10 / 10	- / 20 / 20	- / 35 / 35	- / 10 / 10	- / 20 / 20	- / 35 / 35	- / 60 / 60	nm	typ.
Mechanical properties									
Stiffness in motion direction	0.8	0.35	0.3	2.3	0.75	0.65	0.4	N/µm	± 20%
Unloaded resonant frequency	1000	450	230	1000	450	230	150	Hz	± 20%
Blocking force	80	105	150	230	225	325	400	N	max.
Drive properties									
Ceramic type	PICMA® P-885	PICMA® P-885	PICMA® P-885	PICMA® P-888	PICMA® P-888	PICMA® P-888	PICMA® P-888		
Electrical Capacitance	1.5	3.1	6.2	6	13	26	39	µF	± 20%
Dynamic operating current coefficient	1.9	1.3	1.6	7.5	5	6	4	µA/(Hz·µm)	± 20%
Miscellaneous									
Operating temperature range	-20 to 80	-20 to 80	-20 to 80	-20 to 80	-20 to 80	-20 to 80	-20 to 80	°C	
Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel		
kg	28 x 17 x 9	46 x 19 x 9	85 x 26 x 9	28 x 22 x 14	46 x 24 x 14	85 x 31 x 14	126 x 34 x 14	mm	
Mass	0.022	0.04	0.105	0.05	0.088	0.215	0.355	kg	± 5%
Cable length	0.5 / 0.5 / 2	0.5 / 0.5 / 2	0.5 / 0.5 / 2	0.5 / 0.5 / 2	0.5 / 0.5 / 2	0.5 / 0.5 / 2	0.5 / 0.5 / 2	m	± 10 mm
Sensor / voltage connection	0- and S-version: open leads SL-version: LEMO connector	0- and S-version: open leads SL-version: LEMO connector	0- and S-version: open leads SL-version: LEMO connector	0- and S-version: open leads L-version: LEMO connector	0- and S-version: open leads L-version: LEMO connector	0- and S-version: open leads L-version: LEMO connector	0- and S-version: open leads SL-version: LEMO connector		

Recommended controller / amplifier
E-610 controller / amplifier see p. 2-110, E-625 bench-top controller see p. 2-114

Linear Actuators & Motors

PiezoWalk® Motors / Actuators

PILine® Ultrasonic Motors

DC-Servo & Stepper Actuators

Piezo Actuators & Components

Guided / Preloaded Actuators

Unpackaged Stack Actuators

Patches/Benders/Tubes/Shear..

Nanopositioning / Piezoelectrics

Nanometrology

Micropositioning

Index